

Auto Focus Plunger Install



Mini / Helix - Model 8000

Required Tools / Parts:

TT0960 - Auto Focus Plunger
5/64" - Hex Wrench
Phillips Screwdriver


Getting Started

1. Power ON machine.



2. Press Focus.


3. Lower table 2-3 inches.

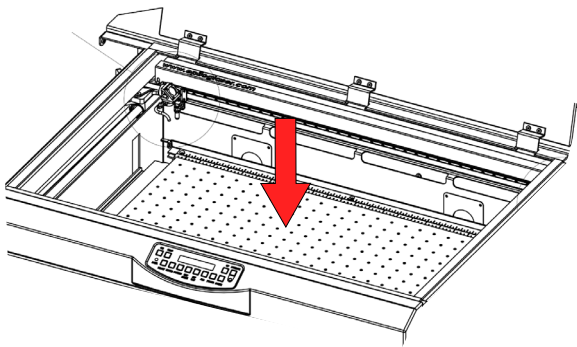


4. Power OFF machine.



5. Loosen the seven (7) Phillips screws on rail cover and remove rail cover.

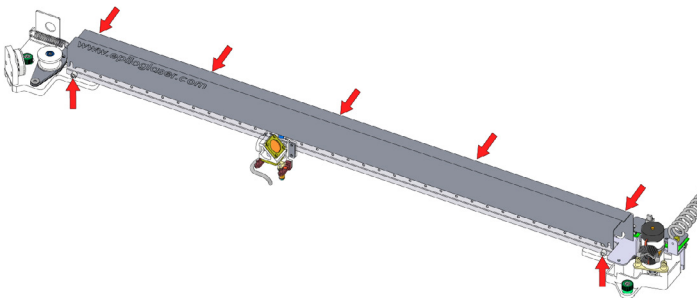


6. Remove 5/64" Hex screw on Auto Focus Plunger magnet. Do NOT discard the magnet.

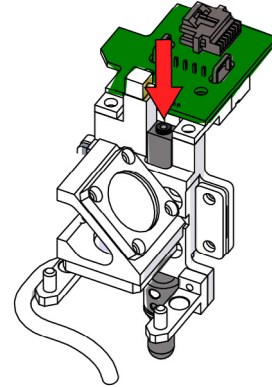


If you received a TT0960 without the magnet block, please reuse the original magnet block when installing the new plunger.


7. Slide Auto Focus Plunger out.

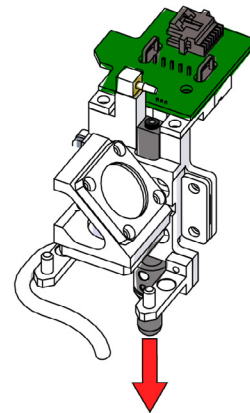


8. Insert replacement Auto Focus Plunger.

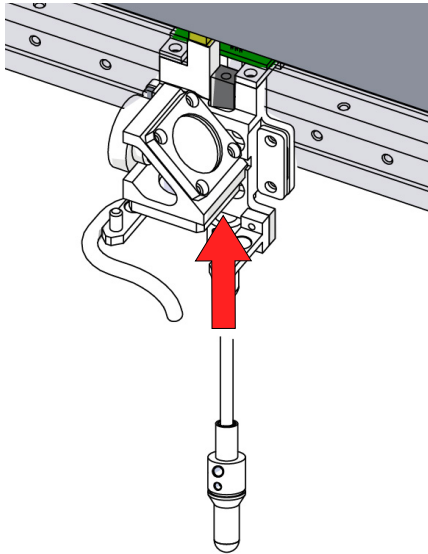

9. While applying light pressure upwards on plunger, reattach the magnet with 5/64" Hex screw. The magnet must face towards the back of the machine.

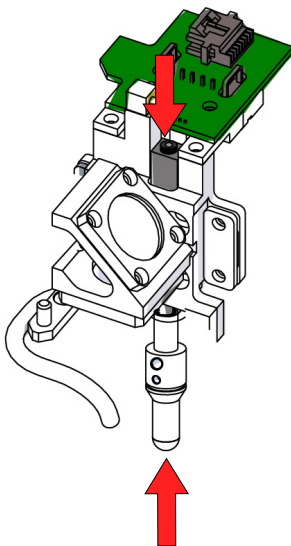

10. Reattach the rail cover.

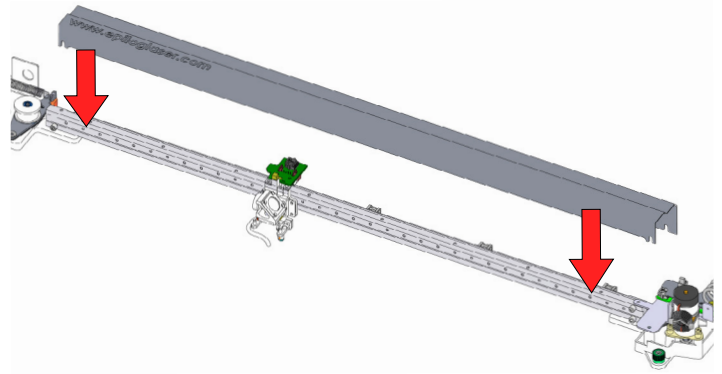

Component View of Carriage

